



Marstech

SB Series- Battery


12SB3.5(12-3.5Ah)

Specifications of 12SB5.4

Rated Voltage		12V
Nominal Capacity	3.5Ah	(C ₂₀ , 1.75V/cell)
Dimension	Length	134±1mm (5.28 inches)
	Width	67±1mm (2.64 inches)
	Container Height	60±2mm (2.34 inches)
	Total Height	65±2mm (2.58 inches)
Approx Weight		1.19 Kg (2.62 lbs)
Terminal		T1/T2
Container Material		ABS
Rated Capacity (25°C)	3.50 Ah	(20hr, 0.270A, 1.75V/cell)
	3.33 Ah	(10hr, 0.333A, 1.75V/cell)
	3.01 Ah	(5hr, 0.60A, 1.75V/cell)
	2.61 Ah	(3hr, 0.87A, 1.75V/cell)
	2.15 Ah	(1hr, 2.15A, 1.60V/cell)
Max. Discharge Current		81A (5s)
Internal Resistance (25°C)		Approx 25mΩ
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	0 ~ 40°C (32 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range		25±3°C (77±5°F)
Standby Use	No limit on Initial Charging Current Voltage	
	13.5V~13.8V at 25°C (77°F)Temp. Coefficient -20mV/°C	
Cycle Use	Initial Charging Current less than 1.6AVoltage	
	14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Effect of temp. to Capacity	103%	
	40°C (104°F)25°C (77°F)0°C (32°F)	
	100%	
Self Discharge	86%	
	Marstech series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required.	
	For higher temperatures the time interval will be shorter.	



Layout

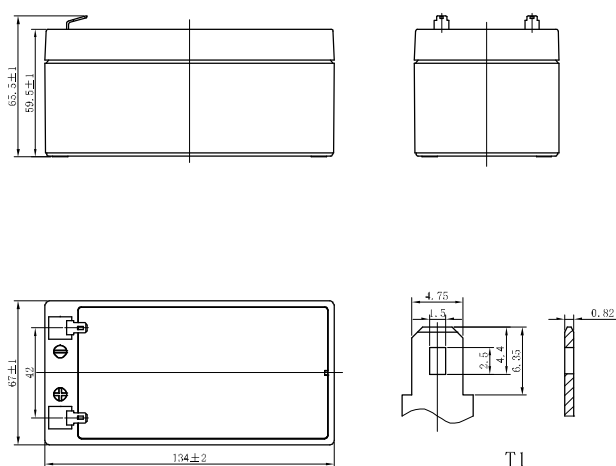

Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	10.6	7.36	5.72	4.66	3.43	2.47	1.94	1.45	1.15	0.845	0.681	0.586	0.502	0.396	0.323	0.171
1.80V/cell	11.4	7.80	6.01	4.84	3.53	2.54	1.99	1.48	1.18	0.859	0.691	0.595	0.510	0.401	0.328	0.173
1.75V/cell	12.0	8.11	6.21	4.98	3.62	2.59	2.03	1.50	1.20	0.872	0.700	0.602	0.516	0.406	0.331	0.175
1.70V/cell	12.5	8.44	6.41	5.12	3.72	2.65	2.07	1.53	1.21	0.885	0.710	0.611	0.522	0.410	0.334	0.176
1.67V/cell	13.0	8.67	6.57	5.23	3.78	2.69	2.10	1.55	1.23	0.894	0.717	0.616	0.527	0.413	0.337	0.178
1.60V/cell	13.8	9.04	6.80	5.38	3.88	2.76	2.15	1.58	1.25	0.910	0.729	0.626	0.534	0.419	0.341	0.180

Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	20.0	14.0	11.0	8.97	6.62	4.79	3.78	2.82	2.26	1.66	1.34	1.16	0.990	0.784	0.643	0.342
1.80V/cell	21.3	14.7	11.4	9.28	6.80	4.90	3.86	2.87	2.29	1.68	1.36	1.17	1.01	0.795	0.651	0.346
1.75V/cell	22.2	15.2	11.7	9.48	6.94	4.99	3.93	2.92	2.33	1.71	1.38	1.19	1.02	0.803	0.657	0.350
1.70V/cell	23.0	15.7	12.1	9.70	7.09	5.08	3.99	2.96	2.36	1.73	1.39	1.20	1.03	0.810	0.663	0.353
1.67V/cell	23.6	16.1	12.3	9.88	7.20	5.15	4.04	2.99	2.38	1.74	1.40	1.21	1.04	0.816	0.668	0.356
1.60V/cell	24.6	16.5	12.7	10.1	7.36	5.24	4.11	3.04	2.42	1.77	1.42	1.23	1.05	0.827	0.675	0.359



SB Series-Battery 12SB3.5(12-3.5Ah)

Applications

- Telecommunications
- UPS system
- Wind power system
- Engine starting
- Wheelchair, Floor cleaning machines, Golf trolley, Boats


General Features

- Battery design life up to 5 years
- Special plate design guarantees battery floating life more than 1800 times
- High thermal capacity reduce the risk of thermal out of control and drying hard, and the battery can be used in bad environment
- Little water losing, and no electrolyte stratification phenomenon


Standards

- IEC 60896 Certified
- Classified as "Long Life"
- ISO 9001 Certified
- Manufactured in standard IATF 16949,


Discharge Characteristics

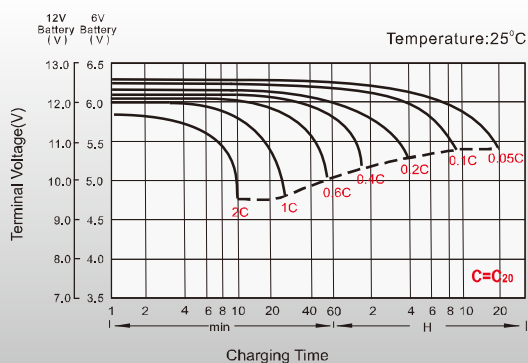


Float Charging Characteristics

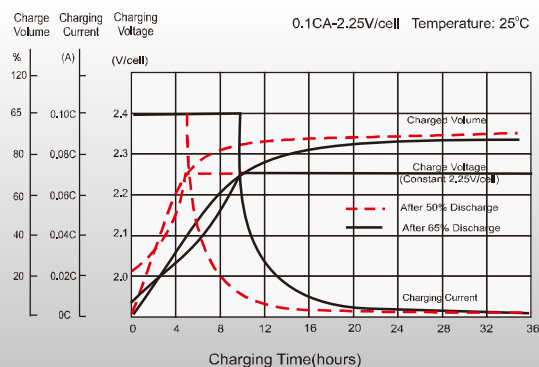

Cycle Life in Relation to Depth of Discharge

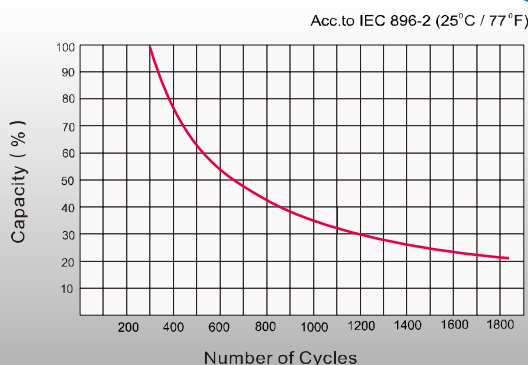

Float Service Life

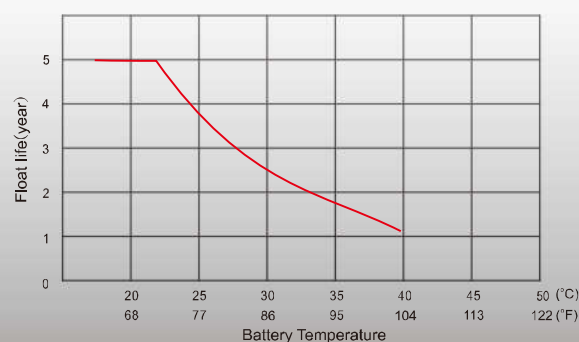

Sales Office

Head Office in MARSTECH SYSTEMS PTE LTD
Block 24, Sin Ming Lane #05-107 Midview City
Singapore

Manufacture in ANHUI LEOCH POWER SUPPLY CORP
No.1 Yingchun Road, Suixi Economic Development Zone,
Suixi Country, Huaibei City, Anhui Province.
P.R.China

Manufacture in LEOCH ACCUPOWER (M) SDN BHD
Lot 13338 & 2493, Jalan Sukeppi, Kawasan Perindustrian,
Jenjarom 42600 Kuala Langat, Selangor Darul Ehsan,
Malaysia