


OPzV SERIES-TUBULAR GEL 8OPzV800 (2V800Ah)

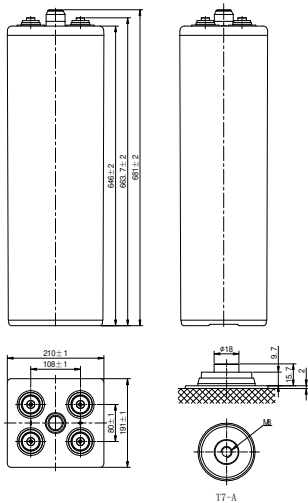

CHARACTERISTICS

Item	Specifications	
Rated Voltage	2V	
Nominal Capacity (25°C)	C ₁₀ , 1.80V/cell	800Ah
Dimension	Length	191mm (7.52inches)
	Width	210mm (8.27inches)
	Container Height	646mm (25.4inches)
	Total Height	681mm (26.8inches)
Approx Weight	65.1kg (143.5lbs)	
Terminal	T7-A(M8)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	4800A	
Internal Resistance (25°C)	Approx 0.5 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.25C	
Charge voltage (25°C)	Standby Use	Cycle Use
	2.25-2.30V/cell	2.35-2.45V/cell
Temp. Coefficient	-3mV/cell/°C	-5mV/cell/°C
Effect of temp. to Capacity	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3% per month at 25°C (77°F)	

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 20°C (77°F)											
F.V/Time	1h	2h	3h	5h	8h	10h	24h	48h	72h	100h	120h
1.85V/cell	357.5	241.8	185.6	127.0	89.0	75.0	35.6	18.6	13.4	10.1	8.75
1.80V/cell	400.8	264.8	201.9	136.8	95.2	80.0	36.8	19.3	13.9	10.4	9.00
1.75V/cell	416.7	274.0	206.4	139.5	96.8	81.4	37.1	19.8	14.2	10.6	9.13
1.70V/cell	435.0	280.9	210.6	141.6	98.2	82.3	37.7	20.2	14.4	10.8	9.26
1.67V/cell	446.3	285.5	214.5	143.9	99.3	83.0	38.0	20.4	14.5	10.9	9.38
1.60V/cell	453.2	290.1	217.0	145.3	100.0	83.7	38.3	20.6	14.6	11.1	9.48
Constant Power Discharge (Watts/cell) at 20°C (77°F)											
F.V/Time	1h	2h	3h	5h	8h	10h	24h	48h	72h	100h	120h
1.85V/cell	690.0	469.7	362.0	249.4	176.4	149.0	71.2	37.3	26.9	20.4	17.6
1.80V/cell	772.0	513.5	391.8	267.7	188.6	158.9	73.5	38.6	27.8	20.9	18.1
1.75V/cell	797.0	525.0	398.7	272.2	191.3	161.1	73.9	39.5	28.5	21.3	18.3
1.70V/cell	824.4	536.5	405.6	276.8	193.4	162.7	75.0	40.2	28.8	21.6	18.6
1.67V/cell	840.3	545.7	412.4	279.1	195.2	164.1	75.6	40.6	29.0	21.9	18.8
1.60V/cell	849.4	550.3	414.7	281.4	196.1	165.0	76.2	41.0	29.1	22.1	19.0

OPzV SERIES-TUBULAR GEL

8OPzV800 (2V800Ah)

APPLICATIONS

- Float charging applications: communication center, telecom basestation, UPS, power station, electric substation
- Solar and wind energy storage system
- Off-grid and bad-grid hybrid sites


GENERAL FEATURES

- 20 year design life (20°C)
- Strong Lead-calcium alloy tubular plate technology - for longer life in the toughest conditions
- Gelled electrolyte for superior thermal management, long float life
- Proof against deep discharge - greater long-term energy delivery
- Exceptional cycling performance - 2500+ cycles at 60% Depth of Discharge


STANDARDS

- Compliance with IEC 60896, IEC 61427, DIN 40742 standards
- UL, CE Approved
- Manufactured in Leoch® IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Charge Voltage vs Ambient Temperature Curve

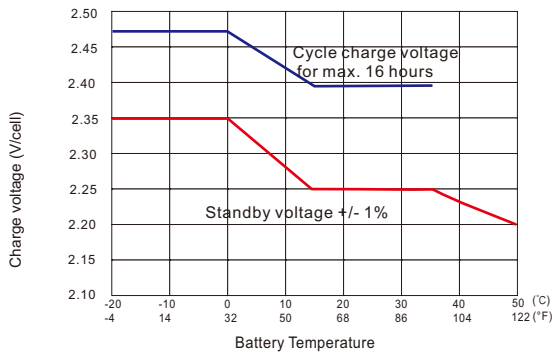


Temperature Effects in Relation to Capacity

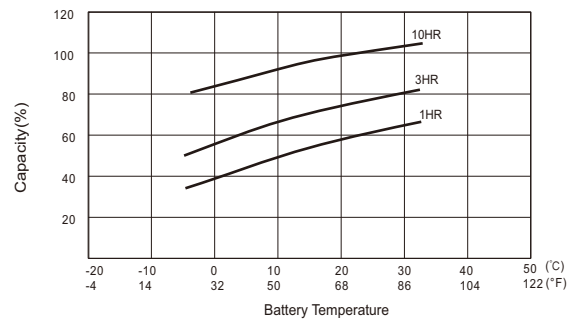

Cycle life

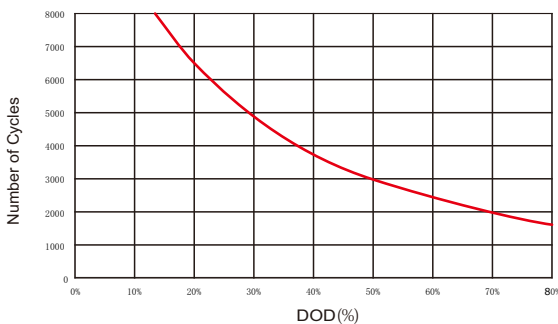

Self Discharge Characteristics

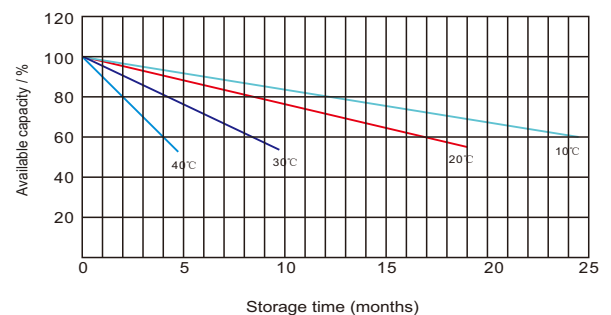

Head Office in MARSTECH SYSTEMS PTE LTD
Block 24, Sin Ming Lane #05-107 Midview City
Singapore

Manufacture in ANHUI LEOCH POWER SUPPLY CORP
No.1, Yingchun Road, Suixi Economic Development Zone,
Suixi Country, Huaibei City, Anhui Province.
P.R.China

Manufacture in LEOCH ACCUPOWER (M) SDN BHD
Lot 13338 & 2493, Jalan Sukeppi, Kawasan Perindustrian,
Jenjarom 42600 Kuala Langat, Selangor Darul Ehsan.
Malaysia